

Cheetah


*Designed for
DFB and DBR lasers*

Intelligent, Low Noise, Temperature Stabilized
Laser System for DFB and DBR Lasers



 **More Power ...**
more stability

Optical Spectrum

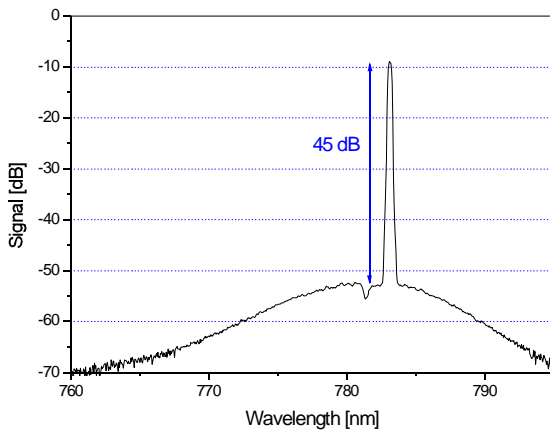

Typical Values:

100mW at 784nm
100mW at 1064nm
80mW at 1083nm

Cheetah Beam Profile

Specifications

Output Power	Free Beam Version	> 50 .. 150 mW
Available Wavelengths		763, 773, 780, 784, 860, 923, 1064, 1083 nm 1338, 1580, 1665, 1742, 1872, 2004, 2330 nm
Wavelength Precision		0.1 nm
Linewidth		< 10MHz, typ. 5MHz
Side Mode Supression		> 45 dB
Beam Waist (2 w ₀)		ca. 3.5 mm x 2.5 mm or fiber coupled
Power Stability		< 0.1% (2 min)
Output Polarization		p - polarized (763 .. 784nm), s - polarized (860 .. 2330nm)
Weight		Laser Head: 1.0 kg, Power Supply: 4.5 kg
Laser Head Dimension (W x H x L)		80 x 65 x 180 mm
Detailed Specifications		http://data.sacher-laser.com/cheetah/cheetahspecs.pdf

Application

*Automated DFB
Measuring Laser
System*

Please contact us

Sacher Lasertechnik
GmbH
Hannah Arendt Str. 3-7
D-35037 Marburg/Lahn
Germany
Tel.: +49 6421 305 - 0
Fax: +49 6421 305299

Sacher Lasertechnik
LLC
5765 Equador Way
Buena Park, CA90620
U. S. A.
Tel.: 1-800-352-3639
Fax: 1-714-670-7662

Email: contact@sacher.de
Web: <http://www.sacher.de>

